



REDCOO™ STRIP DOOR

SAVE ENERGY WITH TEMPERATURE RETENTION

INCREASE PRODUCTIVITY BY OPENING
TRAFFIC FLOW

REDUCE MAINTENANCE AND CLEAN UP COSTS

IMPROVE WORKING CONDITIONS BY MAINTAINING
AMBIENT TEMPERATURES

IMPROVE EMPLOYEE SAFETY BY REDUCING NOISE
AND INCREASING VISIBILITY



CONTACT US TODAY
CDN 1-800-667-0999
USA 1-866-733-2684

www.redwoodplastics.com


Innovative Solutions in Plastic

Redco™ PVC Strip Door brings solutions to a variety of installations. Heated or cooled air becomes contained resulting in energy savings lost from unprotected openings. Dust, dirt and other contaminants remain contained to reduce overall clean up costs. As well, Redco™ PVC Strip Door creates a safer and more productive work environment by providing protection from the elements, noise and harsh working environments, while creating an easy, fully visible passageway for personnel, animals and machinery.

AVAILABLE GRADES:

	Standard Temperature Grade	Low Temperature Grade
Widths Available:	8" (.080" thick) & 12" (.120" thick)	8" (.080" thick) & 12" (.120" thick)
Temp. Tolerance:	0° F to 150° F	-30° F to 150° F

APPLICATIONS TO CONTROL A VARIETY OF ENVIRONMENTS

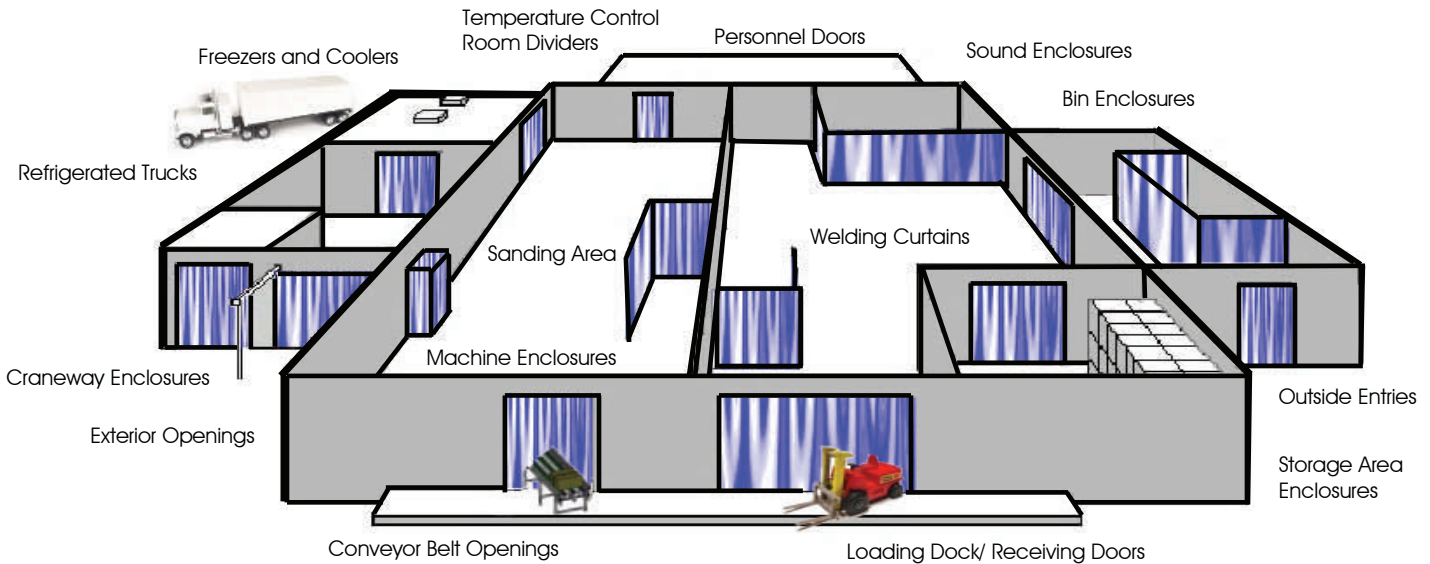

We will work with you to make certain the most optimal material is used for your application, ensuring your project will be a success.

Contact Your Local Representative Today

www.redwoodplastics.com



We cannot anticipate all conditions under which this information and our products or the products of other manufacturers in combination with our products may be used. We accept no responsibility for results obtained by the application of this or the safety and suitability of our products, whether alone or in combination with other products. Users are advised to make their own test to determine the safety and suit ability of each such product or product combination for their own purposes. Unless otherwise agreed in writing, we sell the products without warranty, and buyers and users assume all responsibility and liability for loss or damage arising from the handling and use of our products, whether used alone or in combination with other products. For most recent technical information, phone 360 225 1491 in USA or 604 607 6000 in Canada.