




MAKE . CREATE . INNOVATE

SELECT YOUR TRUCK BOX LINER SYSTEM


MATERIAL	CHARACTERISTICS & VARIETIES	IMPACT VALUES	MEDIA TRANSPORTED
HMW Ltd.® Roll Stock	Non-sticking surface - Limited abrasion resistance.	Minimal	Fine Sand, Dry Dirt, Snow
UHMW Durapro® Roll Stock	Good Abrasion Resistance Fast Installation Process Used in higher temperature applications up to 180°F	Moderate	Crushed Rock & Sand, Wet Dirt Gravel, Excavation Residue
UHMW Quicksilver® Roll Stock	Excellent abrasion resistance Excellent Non-stick qualities Used in applications up to 350°F for asphalt	Moderate to Superior	Gravel, Asphalt Excavation Residue
UHMW Reprocessed Sheets	Non-sticking, Better abrasion than HMW Ltd.® 4'x10' Sheets -Simplified attachment process	Moderate	Crushed Sand, Wet Dirt, Gravel, Excavation Residue
UHMW Tivar-88® Sheets	Double the abrasion life than reprocessed Will take larger particulate & rock US 3/4" or more for floor liners More dimensionally stable Retains Coefficient of Friction in High Heat	Superior	Gravel, Rock, Fluid Products, Excavation Residue

PERFORMANCE* vs YEARS

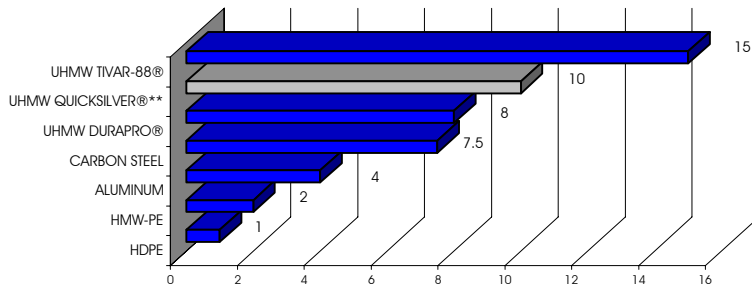

*Tested Performances: Between -100 and +100 °F
**Handles Hot Asphalt Up to 350°F (177°C)

COMPARATIVE WEIGHT SAVING WITH PLASTIC

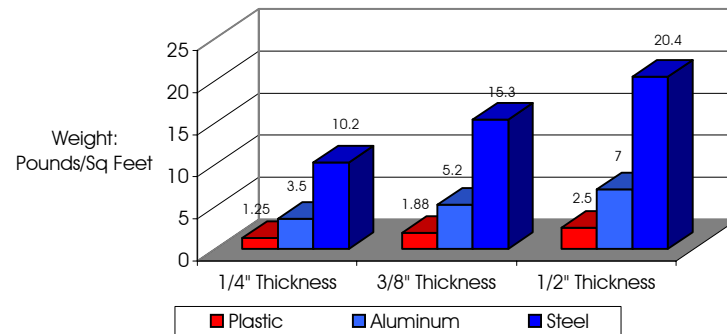

www.redwoodplastics.com

833 381 1195